



JL / JLIF Joist Hangers


The JL series is a light-capacity 2x joist hanger and the JLIF inverted flange series is a light to medium-capacity joist hanger for 2x lumber applications.

Materials: JL - 20 gauge; JLIF - 18 gauge

Finish: JL - G90 galvanizing; JLIF - G185 galvanizing

Options: See current catalogue for options.


Codes: Factored resistances are derived from data submitted to various North American building code evaluators.



JL26



Typical JL26 installation



JLIF



Typical JLIF installation



PEO
Certificate No. 10889485

Dec. 19, 2017

Joist Size	MiTek Stock No.	H (in)	Fastener Schedule ²				DF Factored Resistance				S-P-F Factored Resistance			
			Header		Joist		Lbs		kN		Lbs		kN	
			Qty	Type	Qty	Type	100%	Uplift ¹	100%	Uplift ¹	100%	Uplift ¹	100%	Uplift ¹
2 x 4	JL24	3	4	10d	2	10d x 1-1/2	940	560	4.18	2.49	740	460	3.29	2.05
	JL24IF-TZ	3-1/8	4	10d HDG	2	10d x 1-1/2 HDG	840	440	3.74	1.96	765	400	3.40	1.78
2 x 6	JL26	4-3/4	6	10d	4	10d x 1-1/2	1385	1070	6.16	4.76	1085	930	4.83	4.14
	JL26IF-TZ	4-1/2	6	10d HDG	4	10d x 1-1/2 HDG	1710	1385	7.61	6.16	1610	1305	7.16	5.80
2 x 8	JL26	4-3/4	6	10d	4	10d x 1-1/2	1385	1070	6.16	4.76	1085	930	4.83	4.14
	JL28	6-3/8	10	10d	6	10d x 1-1/2	2050	1495	9.12	6.65	1610	1225	7.16	5.45
	JL26IF-TZ	4-1/2	6	10d HDG	4	10d x 1-1/2 HDG	1710	1385	7.61	6.16	1610	1305	7.16	5.80
2 x 10	JL28IF-TZ	6-1/8	8	10d HDG	4	10d x 1-1/2 HDG	1710	1385	7.61	6.16	1610	1305	7.16	5.80
	JL28	6-3/8	10	10d	6	10d x 1-1/2	2050	1495	9.12	6.65	1610	1225	7.16	5.45
	JL210	8-1/4	14	10d	8	10d x 1-1/2	2975	1925	13.23	8.56	2335	1575	10.39	7.01
	JL28IF-TZ	6-1/8	8	10d HDG	4	10d x 1-1/2 HDG	1710	1385	7.61	6.16	1610	1305	7.16	5.80
2 x 12	JL210IF-TZ	8-7/32	11	10d HDG	6	10d x 1-1/2 HDG	3135	2175	13.95	9.67	2810	2050	12.50	9.12
	JL210	8-1/4	14	10d	8	10d x 1-1/2	2975	1925	13.23	8.56	2335	1575	10.39	7.01
	JL210IF-TZ	8-7/32	11	10d HDG	6	10d x 1-1/2 HDG	3135	2175	13.95	9.67	2810	2050	12.50	9.12

1) Factored uplift resistances have been increased 15% for short-term loads such as wind and earthquake; no further increase allowed.

2) **NAILS:** 10d x 1-1/2" nails are 0.148" dia. x 1-1/2" long, 10d nails are 0.148" dia. x 3" long.

Updated product information is designated in **blue font**.

Use in conjunction with MiTek's current Canadian Product Catalogue for detailed hanger information.

Valid through Dec. 31, 2018



**MiTek supplies quality products
to build Stronger Safer Structures**

MiTek.ca

Copyright © 2017 MiTek Industries, Inc. All Rights Reserved.
December 2017 USP2320-JL/JLIF



JL / JLIF Joist Hangers


The JL series is a light-capacity 2x joist hanger and the JLIF inverted flange series is a light to medium-capacity joist hanger for 2x lumber applications.

Materials: JL - 20 gauge; JLIF - 18 gauge

Finish: JL - G90 galvanizing; JLIF - G185 galvanizing

Options: See current catalogue for options.


Codes: Factored resistances are derived from data submitted to various North American building code evaluators.



JL26



Typical JL26 installation



JLIF



Typical JLIF installation

Joist Size	MiTek Stock No.	H (in)	Fastener Schedule ²				DF Factored Resistance				S-P-F Factored Resistance			
			Header		Joist		Lbs		kN		Lbs		kN	
			Qty	Type	Qty	Type	100%	Uplift ¹	100%	Uplift ¹	100%	Uplift ¹	100%	Uplift ¹
2 x 4	JL24	3	4	10d	2	10d x 1-1/2	940	560	4.18	2.49	740	460	3.29	2.05
	JL24IF-TZ	3-1/8	4	10d HDG	2	10d x 1-1/2 HDG	840	440	3.74	1.96	765	400	3.40	1.78
2 x 6	JL26	4-3/4	6	10d	4	10d x 1-1/2	1385	1070	6.16	4.76	1085	930	4.83	4.14
	JL26IF-TZ	4-1/2	6	10d HDG	4	10d x 1-1/2 HDG	1710	1385	7.61	6.16	1610	1305	7.16	5.80
2 x 8	JL26	4-3/4	6	10d	4	10d x 1-1/2	1385	1070	6.16	4.76	1085	930	4.83	4.14
	JL28	6-3/8	10	10d	6	10d x 1-1/2	2050	1495	9.12	6.65	1610	1225	7.16	5.45
2 x 10	JL26IF-TZ	4-1/2	6	10d HDG	4	10d x 1-1/2 HDG	1710	1385	7.61	6.16	1610	1305	7.16	5.80
	JL28IF-TZ	6-1/8	8	10d HDG	4	10d x 1-1/2 HDG	1710	1385	7.61	6.16	1610	1305	7.16	5.80
2 x 12	JL28	6-3/8	10	10d	6	10d x 1-1/2	2050	1495	9.12	6.65	1610	1225	7.16	5.45
	JL210	8-1/4	14	10d	8	10d x 1-1/2	2975	1925	13.23	8.56	2335	1575	10.39	7.01
	JL210IF-TZ	8-7/32	11	10d HDG	6	10d x 1-1/2 HDG	3135	2175	13.95	9.67	2810	2050	12.50	9.12
2 x 12	JL210	8-1/4	14	10d	8	10d x 1-1/2	2975	1925	13.23	8.56	2335	1575	10.39	7.01
	JL210IF-TZ	8-7/32	11	10d HDG	6	10d x 1-1/2 HDG	3135	2175	13.95	9.67	2810	2050	12.50	9.12

1) Factored uplift resistances have been increased 15% for short-term loads such as wind and earthquake; no further increase allowed.

2) **NAILS:** 10d x 1-1/2" nails are 0.148" dia. x 1-1/2" long, 10d nails are 0.148" dia. x 3" long.

Updated product information is designated in **blue font**.

Use in conjunction with MiTek's current Canadian Product Catalogue for detailed hanger information.




MiTek supplies quality products to build Stronger Safer Structures

MiTek.ca

Copyright © 2017 MiTek Industries, Inc. All Rights Reserved. December 2017 USP2320-JL/JLIF

APEGA
Permit No. P3837



Dec. 19, 2017



Dec. 19, 2017

APEGM
Certificate No. 96



Dec. 19, 2017

APEGS
Certificate No. C0940



Dec. 19, 2017

YR. MN. DAY

Valid through Dec. 31, 2018



JL / JLIF Joist Hangers

The JL series is a light-capacity 2x joist hanger and the JLIF inverted flange series is a light to medium-capacity joist hanger for 2x lumber applications.




- Materials:** JL - 20 gauge; JLIF - 18 gauge
- Finish:** JL - G90 galvanizing; JLIF - G185 galvanizing
- Options:** See current catalogue for options.
- Codes:** Factored resistances are derived from data submitted to various North American building code evaluators.



Dec. 19, 2017




APEGNB
Certificate No. F0649

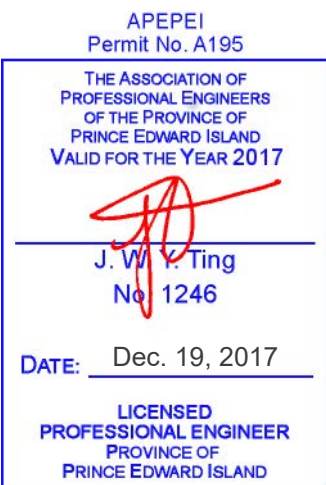

JL26



Typical JL26 installation



JLIF



Typical JLIF installation

Joist Size	MiTek Stock No.	H (in)	Fastener Schedule ²				DF Factored Resistance				S-P-F Factored Resistance			
			Header		Joist		Lbs		kN		Lbs		kN	
			Qty	Type	Qty	Type	Vertical	Uplift ¹	Vertical	Uplift ¹	Vertical	Uplift ¹	Vertical	Uplift ¹
2 x 4	JL24	3	4	10d	2	10d x 1-1/2	940	560	4.18	2.49	740	460	3.29	2.05
	JL24IF-TZ	3-1/8	4	10d HDG	2	10d x 1-1/2 HDG	840	440	3.74	1.96	765	400	3.40	1.78
2 x 6	JL26	4-3/4	6	10d	4	10d x 1-1/2	1385	1070	6.16	4.76	1085	930	4.83	4.14
	JL26IF-TZ	4-1/2	6	10d HDG	4	10d x 1-1/2 HDG	1710	1385	7.61	6.16	1610	1305	7.16	5.80
2 x 8	JL26	4-3/4	6	10d	4	10d x 1-1/2	1385	1070	6.16	4.76	1085	930	4.83	4.14
	JL28	6-3/8	10	10d	6	10d x 1-1/2	2050	1495	9.12	6.65	1610	1225	7.16	5.45
	JL26IF-TZ	4-1/2	6	10d HDG	4	10d x 1-1/2 HDG	1710	1385	7.61	6.16	1610	1305	7.16	5.80
	JL28IF-TZ	6-1/8	8	10d HDG	4	10d x 1-1/2 HDG	1710	1385	7.61	6.16	1610	1305	7.16	5.80
2 x 10	JL28	6-3/8	10	10d	6	10d x 1-1/2	2050	1495	9.12	6.65	1610	1225	7.16	5.45
	JL210	8-1/4	14	10d	8	10d x 1-1/2	2975	1925	13.23	8.56	2335	1575	10.39	7.01
	JL28IF-TZ	6-1/8	8	10d HDG	4	10d x 1-1/2 HDG	1710	1385	7.61	6.16	1610	1305	7.16	5.80
	JL210IF-TZ	8-7/32	11	10d HDG	6	10d x 1-1/2 HDG	3135	2175	13.95	9.67	2810	2050	12.50	9.12
2 x 12	JL210	8-1/4	14	10d	8	10d x 1-1/2	2975	1925	13.23	8.56	2335	1575	10.39	7.01
	JL210IF-TZ	8-7/32	11	10d HDG	6	10d x 1-1/2 HDG	3135	2175	13.95	9.67	2810	2050	12.50	9.12

1) Factored uplift resistances have been increased 15% for short-term loads such as wind and earthquake; no further increase allowed.
 2) **NAILS:** 10d x 1-1/2" nails are 0.148" dia. x 1-1/2" long, 10d nails are 0.148" dia. x 3" long.
 Updated product information is designated in **blue font**.

Use in conjunction with MiTek's current Canadian Product Catalogue for detailed hanger information.

Valid through Dec. 31, 2018



MiTek supplies quality products
to build Stronger Safer Structures

MiTek.ca

Copyright © 2017 MiTek Industries, Inc. All Rights Reserved.
December 2017 USP2320-JL/JLIF