

THDHQ Girder Truss Hangers




THDHQ hangers are designed to attach multi-ply girder trusses together using USP's WS Wood Screws for higher design load capacity. THDHQ hangers can also be used to attach structural composite lumber (SCL).

Materials: 12 gauge
Finish: G90 galvanizing

Installation:

- Use all specified fasteners.
- WS Wood Screws are supplied with THDHQ hangers.
- See table footnotes.



Typical THDHQ28-2 truss installation



Typical THDHQ28-2 SCL installation

Supported Member	MiTek Stock No.	Dimensions (in)			Fastener Schedule ^{1,7}				DF Factored Resistance		S-P-F Factored Resistance		
		W	H	A	Supporting Member ^{3,4,5}		Supported Member		Unit	Vertical 100%	Uplift ² 115%	Vertical 100%	Uplift ² 115%
					Qty	Type	Qty	Type					
Double 2x Sizes													
(2) 2 x 6 - 8	THDHQ26-2	3-5/16	5-7/16	1-15/16	12	WS3	4	WS3	Lbs	8130	3545	6380	2845
									kN	36.16	15.77	28.38	12.66
(2) 2 x 8 - 10	THDHQ28-2	3-5/16	7-3/16	2-13/16	20	WS3	8	WS3	Lbs	14660	6290	11510	5240
									kN	65.21	27.98	51.20	23.31
(2) 2 x 10 - 12	THDHQ210-2	3-5/16	9-3/16	2-13/16	28	WS3	8	WS3	Lbs	16195	9695	12715	8075
									kN	72.04	43.13	56.56	35.92
Triple 2x Sizes													
(3) 2 x 6 - 8	THDHQ26-3	4-15/16	5-7/16	1-15/16	12	WS45	4	WS45	Lbs	8130	3545	6380	2845
									kN	36.16	15.77	28.38	12.66
(3) 2 x 8 - 10	THDHQ28-3	4-15/16	7-3/16	2-13/16	20	WS45	8	WS45	Lbs	14660	6290	11510	5240
									kN	65.21	27.98	51.20	23.31
(3) 2 x 10 - 12	THDHQ210-3	4-15/16	9-3/16	2-13/16	28	WS45	8	WS45	Lbs	16195	9695	12715	8075
									kN	72.04	43.13	56.56	35.92
Quadruple 2x Sizes													
(4) 2 x 6 - 8	THDHQ26-4	6-9/16	5-7/16	1-15/16	12	WS6	4	WS6	Lbs	8130	4565	6380	3585
									kN	36.16	20.31	28.38	15.95
(4) 2 x 8 - 10	THDHQ28-4	6-9/16	7-3/16	2-13/16	20	WS6	8	WS6	Lbs	14660	8335	11510	6945
									kN	65.21	37.08	51.20	30.89
(4) 2 x 10 - 12	THDHQ210-4	6-9/16	9-3/16	2-13/16	28	WS6	8	WS6	Lbs	16195	7695	12715	6410
									kN	72.04	34.23	56.56	28.51
4x Sizes													
4 x 6 - 8	THDHQ46	3-5/8	5-7/16	1-15/16	12	WS3	8	WS3	Lbs	8130	3545	6380	2845
									kN	36.16	15.77	28.38	12.66
4 x 8 - 10	THDHQ48	3-5/8	7-3/16	2-13/16	20	WS3	8	WS3	Lbs	14660	6290	11510	5240
									kN	65.21	27.98	51.20	23.31
4 x 10 - 12	THDHQ410	3-5/8	9-3/16	2-13/16	28	WS3	8	WS3	Lbs	16195	9695	12715	8075
									kN	72.04	43.13	56.56	35.92

- 1) WS Series screws are 1/4" diameter wood screws. WS3 is 3" long, WS45 is 4-1/2" long and WS6 is 6" long.
- 2) Factored uplift resistances have been increased 15% for short-term loads such as wind and earthquake; no further increase allowed.
- 3) WS Wood Screw length into supporting member is based on supporting member width being equal to supported member width. See notes 4 and 5 for fastening information.
- 4) WS Wood Screws shall penetrate properly into all plies of the supporting member and as a minimum, penetration into the last ply of the supporting member shall be at least one inch. Additional WS screws (not supplied) can be installed to the back side of the outer ply, designed by others, when the aforementioned penetration requirement is not met.
- 5) For construction safety concern, if the supplied WS Wood Screws protrude past the last ply of the supporting member, shorter length WS screws can be used; ex. WS3 screws may be substituted for WS45 screws and WS45 screws may be substituted for WS6 screws, with no load reduction. Alternately, a backer block member may be used as determined by the designer.
- 6) Cross-grain tension may limit factored resistances per CSA O86-14 Section 12.2.1.4. For assistance, contact USP Structural Connectors.
- 7) WS Wood Screws may be installed through metal truss connector plates as approved by the Truss Designer, provided the requirements of CSA O86-14 Section 5.3.8 and TPIC-2014 Section 7.5 are met. (Pre-drilling required through the plate using a maximum of 5/32" bit).
- 8) For hanger installations supported by LSL, of specific gravity no less than 0.50, use the DF-L factored resistances. New products or updated product information are designated in blue font.

Use in conjunction with USP's current Canadian Product Catalogue for detailed hanger information.

PEO
 Certificate No. 10889485



Dec. 19, 2017

Valid through Dec. 31, 2018



**USP supplies quality products
 to build Stronger Safer Structures**
USPconnectors.com

USP2320-THDHQ
 Revised February 2016
 ©2016 MiTek Industries, Inc. All Rights Reserved.




THDHQ Girder Truss Hangers

THDHQ hangers are designed to attach multi-ply girder trusses together using USP's WS Wood Screws for higher design load capacity. THDHQ hangers can also be used to attach structural composite lumber (SCL).

Materials: 12 gauge
Finish: G90 galvanizing

Installation:

- Use all specified fasteners.
- WS Wood Screws are supplied with THDHQ hangers.
- See table footnotes.



THDHQ28-2



Typical THDHQ28-2 truss installation




Typical THDHQ28-2 SCL installation

Supported Member	MiTek Stock No.	Dimensions (in)			Fastener Schedule ^{1,7}				DF Factored Resistance		S-P-F Factored Resistance		
		W	H	A	Supporting Member ^{3,4,5}		Supported Member		Unit	Vertical 100%	Uplift ² 115%	Vertical 100%	Uplift ² 115%
					Qty	Type	Qty	Type					
Double 2x Sizes													
(2) 2 x 6 - 8	THDHQ26-2	3-5/16	5-7/16	1-15/16	12	WS3	4	WS3	Lbs	8130	3545	6380	2845
									kN	36.16	15.77	28.38	12.66
(2) 2 x 8 - 10	THDHQ28-2	3-5/16	7-3/16	2-13/16	20	WS3	8	WS3	Lbs	14660	6290	11510	5240
									kN	65.21	27.98	51.20	23.31
(2) 2 x 10 - 12	THDHQ210-2	3-5/16	9-3/16	2-13/16	28	WS3	8	WS3	Lbs	16195	9695	12715	8075
									kN	72.04	43.13	56.56	35.92
Triple 2x Sizes													
(3) 2 x 6 - 8	THDHQ26-3	4-15/16	5-7/16	1-15/16	12	WS45	4	WS45	Lbs	8130	3545	6380	2845
									kN	36.16	15.77	28.38	12.66
(3) 2 x 8 - 10	THDHQ28-3	4-15/16	7-3/16	2-13/16	20	WS45	8	WS45	Lbs	14660	6290	11510	5240
									kN	65.21	27.98	51.20	23.31
(3) 2 x 10 - 12	THDHQ210-3	4-15/16	9-3/16	2-13/16	28	WS45	8	WS45	Lbs	16195	9695	12715	8075
									kN	72.04	43.13	56.56	35.92
Quadruple 2x Sizes													
(4) 2 x 6 - 8	THDHQ26-4	6-9/16	5-7/16	1-15/16	12	WS6	4	WS6	Lbs	8130	4565	6380	3585
									kN	36.16	20.31	28.38	15.95
(4) 2 x 8 - 10	THDHQ28-4	6-9/16	7-3/16	2-13/16	20	WS6	8	WS6	Lbs	14660	8335	11510	6945
									kN	65.21	37.08	51.20	30.89
(4) 2 x 10 - 12	THDHQ210-4	6-9/16	9-3/16	2-13/16	28	WS6	8	WS6	Lbs	16195	7695	12715	6410
									kN	72.04	34.23	56.56	28.51
4x Sizes													
4 x 6 - 8	THDHQ46	3-5/8	5-7/16	1-15/16	12	WS3	8	WS3	Lbs	8130	3545	6380	2845
									kN	36.16	15.77	28.38	12.66
4 x 8 - 10	THDHQ48	3-5/8	7-3/16	2-13/16	20	WS3	8	WS3	Lbs	14660	6290	11510	5240
									kN	65.21	27.98	51.20	23.31
4 x 10 - 12	THDHQ410	3-5/8	9-3/16	2-13/16	28	WS3	8	WS3	Lbs	16195	9695	12715	8075
									kN	72.04	43.13	56.56	35.92

- 1) WS Series screws are 1/4" diameter wood screws. WS3 is 3" long, WS45 is 4-1/2" long and WS6 is 6" long.
- 2) Factored uplift resistances have been increased 15% for short-term loads such as wind and earthquake; no further increase allowed.
- 3) WS Wood Screw length into supporting member is based on supporting member width being equal to supported member width. See notes 4 and 5 for fastening information.
- 4) WS Wood Screws shall penetrate properly into all plies of the supporting member and as a minimum, penetration into the last ply of the supporting member shall be at least one inch. Additional WS screws (not supplied) can be installed to the back side of the outer ply, designed by others, when the aforementioned penetration requirement is not met.
- 5) For construction safety concern, if the supplied WS Wood Screws protrude past the last ply of the supporting member, shorter length WS screws can be used; ex. WS3 screws may be substituted for WS45 screws and WS45 screws may be substituted for WS6 screws, with no load reduction. Alternately, a backer block member may be used as determined by the designer.
- 6) Cross-grain tension may limit factored resistances per CSA O86-14 Section 12.2.1.4. For assistance, contact USP Structural Connectors.
- 7) WS Wood Screws may be installed through metal truss connector plates as approved by the Truss Designer, provided the requirements of CSA O86-14 Section 5.3.8 and TPIC-2014 Section 7.5 are met. (Pre-drilling required through the plate using a maximum of 5/32" bit).
- 8) For hanger installations supported by LSL, of specific gravity no less than 0.50, use the DF-L factored resistances. New products or updated product information are designated in blue font.

Use in conjunction with USP's current Canadian Product Catalogue for detailed hanger information.



Valid through Dec. 31, 2018



USP supplies quality products
to build Stronger Safer Structures
USPconnectors.com

USP2320-THDHQ
Revised February 2016
©2016 MiTek Industries, Inc. All Rights Reserved.

APENS
Permit No. 15800 0




Dec. 19, 2017

PEG
Permit No. D0027



Dec. 19, 2017


APEGNB
Certificate No. F0649



Dec. 19, 2017

INGÉNIEURE TITULAIRE DE PERMIS
Province du Nouveau-Brunswick

APEPEI
Permit No. A195

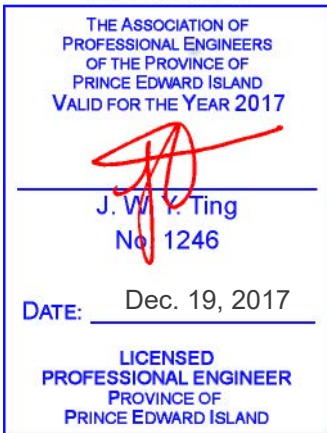

DATE: Dec. 19, 2017

LICENSED
PROFESSIONAL ENGINEER
PROVINCE OF
PRINCE EDWARD ISLAND

THDHQ Girder Truss Hangers




THDHQ hangers are designed to attach multi-ply girder trusses together using USP's WS Wood Screws for higher design load capacity. THDHQ hangers can also be used to attach structural composite lumber (SCL).

Materials: 12 gauge
Finish: G90 galvanizing

Installation:

- Use all specified fasteners.
- WS Wood Screws are supplied with THDHQ hangers.
- See table footnotes.



THDHQ28-2



Typical THDHQ28-2 truss installation



Typical THDHQ28-2 SCL installation

Supported Member	MiTek Stock No.	Dimensions (in)			Fastener Schedule ^{1,7}				DF Factored Resistance		S-P-F Factored Resistance		
		W	H	A	Supporting Member ^{3,4,5}		Supported Member		Unit	Vertical 100%	Uplift ² 115%	Vertical 100%	Uplift ² 115%
					Qty	Type	Qty	Type					
Double 2x Sizes													
(2) 2 x 6 - 8	THDHQ26-2	3-5/16	5-7/16	1-15/16	12	WS3	4	WS3	Lbs	8130	3545	6380	2845
									kN	36.16	15.77	28.38	12.66
(2) 2 x 8 - 10	THDHQ28-2	3-5/16	7-3/16	2-13/16	20	WS3	8	WS3	Lbs	14660	6290	11510	5240
									kN	65.21	27.98	51.20	23.31
(2) 2 x 10 - 12	THDHQ210-2	3-5/16	9-3/16	2-13/16	28	WS3	8	WS3	Lbs	16195	9695	12715	8075
									kN	72.04	43.13	56.56	35.92
Triple 2x Sizes													
(3) 2 x 6 - 8	THDHQ26-3	4-15/16	5-7/16	1-15/16	12	WS45	4	WS45	Lbs	8130	3545	6380	2845
									kN	36.16	15.77	28.38	12.66
(3) 2 x 8 - 10	THDHQ28-3	4-15/16	7-3/16	2-13/16	20	WS45	8	WS45	Lbs	14660	6290	11510	5240
									kN	65.21	27.98	51.20	23.31
(3) 2 x 10 - 12	THDHQ210-3	4-15/16	9-3/16	2-13/16	28	WS45	8	WS45	Lbs	16195	9695	12715	8075
									kN	72.04	43.13	56.56	35.92
Quadruple 2x Sizes													
(4) 2 x 6 - 8	THDHQ26-4	6-9/16	5-7/16	1-15/16	12	WS6	4	WS6	Lbs	8130	4565	6380	3585
									kN	36.16	20.31	28.38	15.95
(4) 2 x 8 - 10	THDHQ28-4	6-9/16	7-3/16	2-13/16	20	WS6	8	WS6	Lbs	14660	8335	11510	6945
									kN	65.21	37.08	51.20	30.89
(4) 2 x 10 - 12	THDHQ210-4	6-9/16	9-3/16	2-13/16	28	WS6	8	WS6	Lbs	16195	7695	12715	6410
									kN	72.04	34.23	56.56	28.51
4x Sizes													
4 x 6 - 8	THDHQ46	3-5/8	5-7/16	1-15/16	12	WS3	8	WS3	Lbs	8130	3545	6380	2845
									kN	36.16	15.77	28.38	12.66
4 x 8 - 10	THDHQ48	3-5/8	7-3/16	2-13/16	20	WS3	8	WS3	Lbs	14660	6290	11510	5240
									kN	65.21	27.98	51.20	23.31
4 x 10 - 12	THDHQ410	3-5/8	9-3/16	2-13/16	28	WS3	8	WS3	Lbs	16195	9695	12715	8075
									kN	72.04	43.13	56.56	35.92

- 1) WS Series screws are 1/4" diameter wood screws. WS3 is 3" long, WS45 is 4-1/2" long and WS6 is 6" long.
- 2) Factored uplift resistances have been increased 15% for short-term loads such as wind and earthquake; no further increase allowed.
- 3) WS Wood Screw length into supporting member is based on supporting member width being equal to supported member width. See notes 4 and 5 for fastening information.
- 4) WS Wood Screws shall penetrate properly into all plies of the supporting member and as a minimum, penetration into the last ply of the supporting member shall be at least one inch. Additional WS screws (not supplied) can be installed to the back side of the outer ply, designed by others, when the aforementioned penetration requirement is not met.
- 5) For construction safety concern, if the supplied WS Wood Screws protrude past the last ply of the supporting member, shorter length WS screws can be used; ex. WS3 screws may be substituted for WS45 screws and WS45 screws may be substituted for WS6 screws, with no load reduction. Alternately, a backer block member may be used as determined by the designer.
- 6) Cross-grain tension may limit factored resistances per CSA O86-14 Section 12.2.1.4. For assistance, contact USP Structural Connectors.
- 7) WS Wood Screws may be installed through metal truss connector plates as approved by the Truss Designer, provided the requirements of CSA O86-14 Section 5.3.8 and TPIC-2014 Section 7.5 are met. (Pre-drilling required through the plate using a maximum of 5/32" bit).
- 8) For hanger installations supported by LSL, of specific gravity no less than 0.50, use the DF-L factored resistances. New products or updated product information are designated in blue font.

Use in conjunction with USP's current Canadian Product Catalogue for detailed hanger information.

Valid through Dec. 31, 2018



USP supplies quality products
to build Stronger Safer Structures
USPconnectors.com

USP2320-THDHQ
Revised February 2016
©2016 MiTek Industries, Inc. All Rights Reserved.